

品號 Washer No.	適用螺絲直徑 Screw/Thread Size			墊圈尺寸 Lock Washer Dimension (mm)							包裝 Packing	
	公制 mm	英制 Inch	美規番號 Code(#)	d 內徑 ID.(mm)	公差 Tol.	D 外徑 OD.(mm)	公差 Tol.	t 厚度 Thickness	公差 Tol.	n 齒數 Nos of Teeth	最低訂購數 MOQ/MPQ	
AW- 2.5(2.6)	2.5(2.6)	—	—	2.7	+0.2	5.7	+0	0.3	±0.025	7	20,000	
3	3	—	3.2	6.5		6		20,000				
3	3	—	3.2	6.5		7		20,000				
3.5	3.5	—	3.7	7.5		8		10,000				
6#	—	0.138	6#	3.8		7.5		0.45		±0.035	8	10,000
4	4	—	4.3	8.5		8		10,000				
8#	—	0.164	8#	4.4		8.3		-0.35		0.45	8	10,000
8#	—	0.164	8#	4.4		8.3		0.5		8	10,000	
10#	—	0.186	10#	5		9.6		0.5		±0.04	8	5,000
5	5	—	5.3	10		8		5,000				
5	5	—	5.3	10	6	5,000						
6	6	—	6.4	11	0.6	9	5,000					
1/4"	—	1/4	6.5	12	0.6	9	3,000					
7	7	—	7.4	13	0.8	10	3,000					
5/16"	—	5/16	8.3	15.4	+0	10	3,000					
8	8	—	8.4	15	-0.5	0.8	±0.05	9	3,000			
3/8"	—	3/8	9.8	17.5	0.8	9		2,000				
3/8"	—	3/8	9.8	17.5	0.8	10	2,000					
10	10	—	10.5	18	0.9	9	2,000					
7/16"	—	7/16	11.4	19.6	0.8	12	2,000					
12	12	—	12.5	21	1	10	2,000					
1/2"	—	1/2	13	22.5	+0	12	2,000					
5/8"	—	5/8	16.5	27	-0.6	1.1	±0.065	12	1,000			
18	18	—	19	29	1.2	12		500				
3/4"	—	3/4	19.6	32	+0.3	1.2		12	500			
7/8"	—	7/8	23.1	35.5	-0.4	1.3	12	500				
1"	—	1	26	41	1.5	12	500					
1-1/8"	—	1 1/8	29.6	46	+0.5	1.5	±0.08	12	200			
1-1/4"	—	1 1/4	33	49	-0.2	1.5		10	200			

*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

*Other sizes may be available upon request




◎ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form J

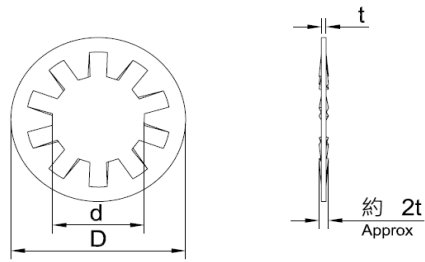

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53 Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑 Black Oxide

鍍白鋅/五彩鋅 Zinc Plating (Bright/Yellow)

鍍鎳 Nickel Plating

◎ 包裝方式 Packaging

散裝 Bulk

最低訂購數量詳見本規格表右側 MOQ/MPQ limit required

HJ SPRING