

| 品號<br>Washer No. | 適用螺絲直徑<br>Screw/Thread Size |            |                 | 墊圈尺寸 Lock Washer Dimension (mm) |               |            |                 |            |                    |        | 包裝<br>Packing    |        |
|------------------|-----------------------------|------------|-----------------|---------------------------------|---------------|------------|-----------------|------------|--------------------|--------|------------------|--------|
|                  | 公制<br>mm                    | 英制<br>Inch | 美規番號<br>Code(#) | d                               |               | D          |                 | t          |                    | n      |                  |        |
| 內徑<br>ID.(mm)    |                             |            |                 | 公差<br>Tol.                      | 外徑<br>OD.(mm) | 公差<br>Tol. | 厚度<br>Thickness | 公差<br>Tol. | 齒數<br>Nos of Teeth |        | 最低訂購數<br>MOQ/MPQ |        |
| <b>BW-</b> 2     | 2                           | —          | —               | 2.2                             | +0.2          | 4.8        | +0              | 0.3        | ±0.025             | 8      | 20,000           |        |
| 2.5(2.6)         | 2.5(2.6)                    | —          | 2.7             | 5.7                             |               | -0.35      | 0.3             | 8          |                    | 20,000 |                  |        |
| 3                | 3                           | —          | 3.2             | -0                              |               | 6.5        | +0              | 0.45       | ±0.035             | 8      | 20,000           |        |
| 3.5              | 3.5                         | —          | 3.7             |                                 |               | 7.5        |                 | 0.45       |                    | 8      | 10,000           |        |
| 6#               | —                           | 0.138      | 6#              |                                 |               | 3.6        |                 | 8.1        |                    | 0.45   | 8                | 10,000 |
| 4                | 4                           | —          | 4.3             |                                 |               | 8.5        |                 | 0.45       |                    | 8      | 10,000           |        |
| 8#               | —                           | 0.164      | 8#              |                                 |               | 4.3        |                 | 9.6        | 0.6                | 9      | 10,000           |        |
| 10#              | —                           | 0.190      | 10#             |                                 |               | 5          |                 | 10.4       | 0.5                | 9      | 5,000            |        |
| 10#              | —                           | 0.190      | 10#             |                                 |               | 5          |                 | 10.4       | 0.5                | 10     | 5,000            |        |
| 10#              | —                           | 0.190      | 10#             |                                 |               | 5          |                 | 10.4       | 0.6                | 9      | 5,000            |        |
| 5                | 5                           | —          | 5.3             | +0.3                            | 10            | -0.4       | 0.6             | ±0.04      | 10                 | 5,000  |                  |        |
| 6                | 6                           | —          | 6.4             |                                 | 11            |            | 0.6             |            | 12                 | 5,000  |                  |        |
| 1/4"             | —                           | 1/4        | 6.6             |                                 | 12.9          |            | 0.6             |            | 12                 | 5,000  |                  |        |
| 1/4"             | —                           | 1/4        | 6.6             |                                 | 12.9          |            | 0.7             |            | 10                 | 5,000  |                  |        |
| 1/4"             | —                           | 1/4        | 6.6             |                                 | 12.9          |            | 0.8             | 10         | 5,000              |        |                  |        |
| 5/16"            | —                           | 5/16       | 8.3             |                                 | 15.4          |            | 0.7             | 12         | 3,000              |        |                  |        |
| 5/16"            | —                           | 5/16       | 8.3             |                                 | 15.4          |            | 0.8             | 12         | 3,000              |        |                  |        |
| 8                | 8                           | —          | 8.4             |                                 | 15            |            | 0.8             | 12         | 3,000              |        |                  |        |
| 3/8"             | —                           | 3/8        | 9.8             |                                 | 17.5          |            | 0.9             | 12         | 3,000              |        |                  |        |
| 3/8"             | —                           | 3/8        | 9.8             |                                 | 17.5          |            | 1               | 12         | 3,000              |        |                  |        |
| 10               | 10                          | —          | 10.5            | +0.4                            | 18            | -0.5       | 0.9             | ±0.055     | 12                 | 3,000  |                  |        |
| 7/16"            | —                           | 7/16       | 11.4            |                                 | 19.5          |            | 0.9             |            | 12                 | 2,000  |                  |        |
| 12               | 12                          | —          | 12.5            |                                 | 21            |            | 1               |            | 12                 | 2,000  |                  |        |
| 1/2"             | —                           | 1/2        | 13              |                                 | 22.7          |            | 1               |            | 12                 | 2,000  |                  |        |
| 14               | 14                          | —          | 14.5            |                                 | -0            |            | 23              | +0         | 1                  | ±0.065 | 12               | 1,000  |
| 9/16"            | —                           | 9/16       | 14.7            |                                 |               |            | 24.9            |            | 1.1                |        | 12               | 1,000  |
| 5/8"             | —                           | 5/8        | 16.5            |                                 |               |            | 27              |            | 1.2                |        | 14               | 1,000  |
| 3/4"             | —                           | 3/4        | 19.6            |                                 |               |            | 32              |            | 1.2                |        | 14               | 500    |
| 7/8"             | —                           | 7/8        | 23              |                                 |               |            | 35.6            |            | 1.5                | 12     | 500              |        |
| 1"               | —                           | 1          | 26              |                                 |               |            | 41              |            | 1.5                | 16     | 500              |        |

\*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

\*Other sizes may be available upon request



◎ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form A


## ◆ BW型-外齒型墊圈

BW SERIES EXTERNAL TOOTHED LOCK WASHER

 華志彈簧五金有限公司

HJ Spring Co., Ltd.

TEL:886-2-29919909 FAX:886-2-29945768

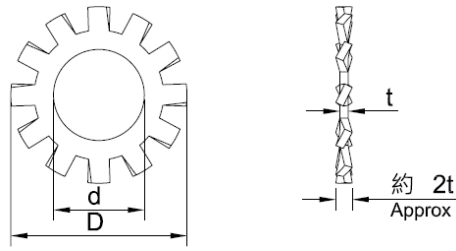

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53    Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑    Black Oxide

鍍白鋅/五彩鋅    Zinc Plating (Bright/Yellow)

鍍鎳    Nickel Plating

◎ 包裝方式 Packaging

散裝    Bulk

最低訂購數量詳見本規格表右側    MOQ/MPQ limit required

HJ SPRING